

Concealed Cisterns

AQUATIZ

CONCEALED CISTERNS

R&T in-wall flush toilet system
provides great design freedom and flexibility.

It makes best use of the space and water saving
with built-in quiet dual flushing mechanism.

A wall-hung toilet makes it simple
to clean beneath the bowl.

1 Deodorizing Cistern

2 Furniture or Cabinet installation

3 Corner Installation

4 Extra-slim wall

5 Front installation

6 Low height mounting

G3009EB
Concealed Cistern

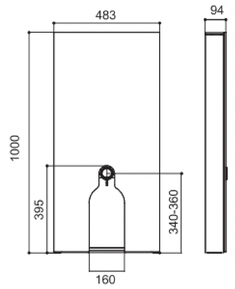

Installation
Front pneumatic dual flush button
External installation
For floor-standing toilet

Features
Cistern thickness：94mm
Pneumatic flush

Flush Volume
3L/6L; 3L/4.5L

G3009EA
Concealed Cistern

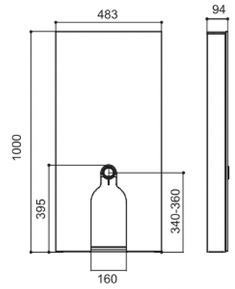

Installation
Front pneumatic dual flush button
External installation
For floor-standing toilet

Features
Cistern thickness：94mm
Pneumatic flush

Flush Volume
3L/6L; 3L/4.5L

G3009QA
Concealed Cistern

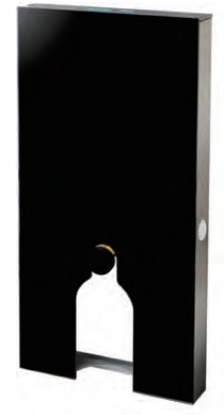

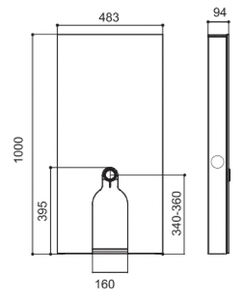

Installation
Top sensing flush button
External installation
For floor-standing toilet

Features
Cistern thickness：94mm
Sensing flush

Flush Volume
3L/6L; 3L/4.5L

G3009QB
Concealed Cistern

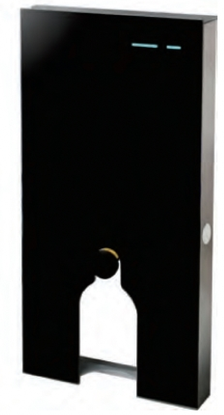

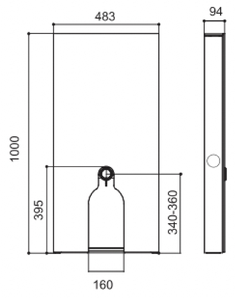

Installation
Front sensing flush button
External installation
For floor-standing toilet

Features
Cistern thickness：94mm
Sensing flush

Flush Volume
3L/6L; 3L/4.5L

G3007
Concealed Cistern

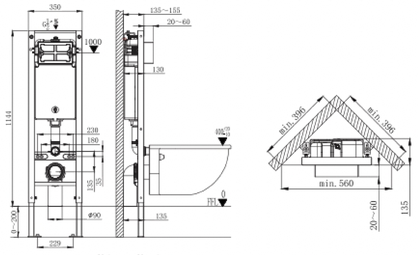

unit:mm

Installation
Front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall
Available for corner installation

Features
Cistern thickness:135mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

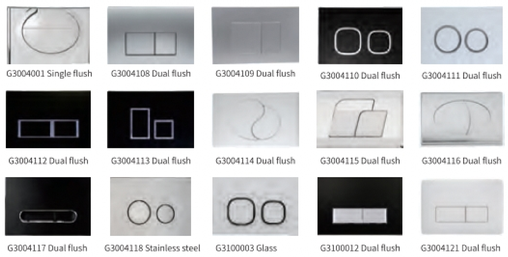

G3010
Concealed Cistern

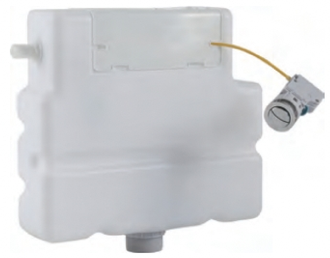

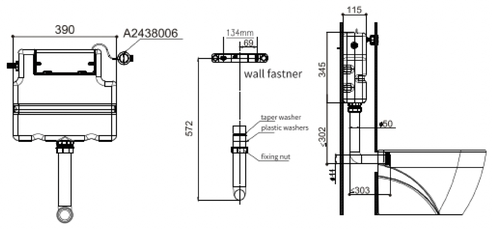

unit:mm

Installation
Pneumatic or cable-controlled flush button
Concealed installation in cabinet
For floor-standing toilet

Features
Cistern thickness 115mm
Actuator installation diameter: ϕ65 or ϕ38mm
Water supply connection on the left/right
Adjustable button position
Integrated blow molding
Flush volume: 3L/6L; 3L/4.5L

Optional Actuators

G3003 Mechanical cistern I
Concealed Cistern

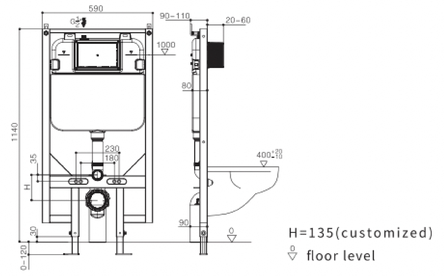

unit:mm

Installation
Front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

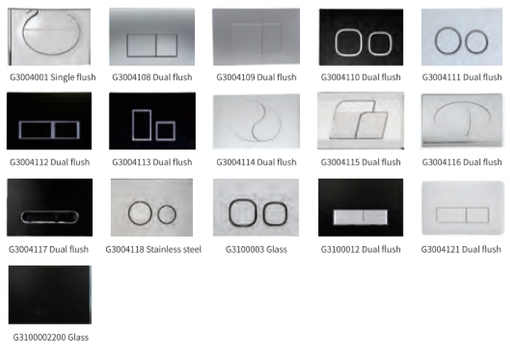

Certificates

G3003 Mechanical cistern II
Concealed Cistern

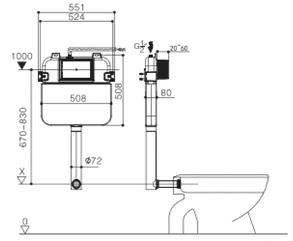

unit:mm

Installation
Front actuation
Concealed installation
For floor-standing toilet

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

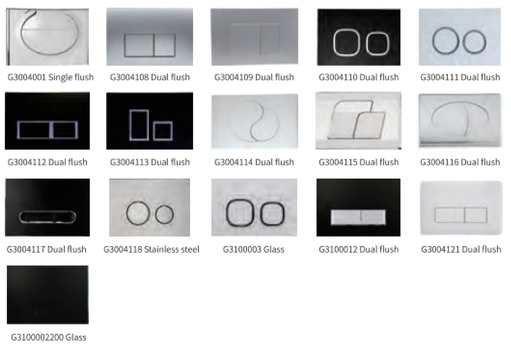

Certificates

G3003 Mechanical cistern III

Concealed Cistern

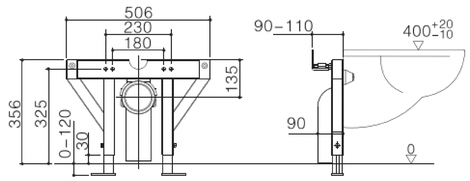

unit:mm

Installation

Front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

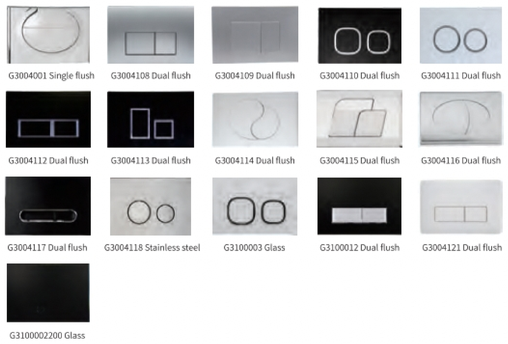

Certificates

G3003 Mechanical cistern IV

Concealed Cistern

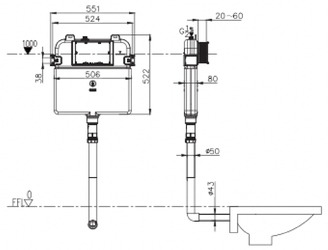

unit:mm

Installation

Front push plate
Concealed installation
For squatting pan

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

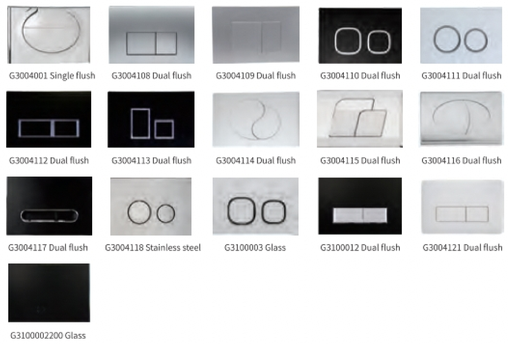

Certificates

G30035 Pneumatic cistern I

Concealed Cistern

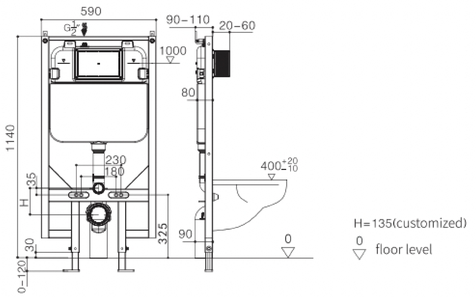

H=135(customized)
0 floor level

unit:mm

Installation

Front pneumatic actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G30035 Pneumatic cistern II

Concealed Cistern

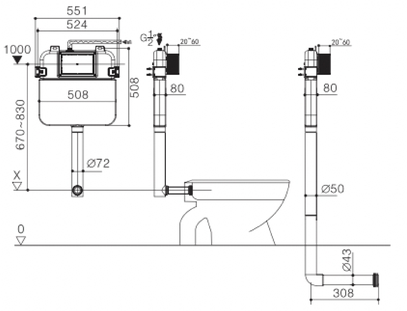

unit:mm

Installation

Front pneumatic actuation
Concealed installation
For floor-standing toilet

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G30035 Pneumatic cistern III

Concealed Cistern

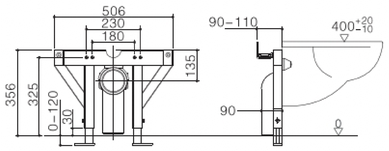

unit:mm

Installation

Pneumatic front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3100005 Plastic pneumatic G3100006 Plastic pneumatic G3100007 Glass

Certificates

G30035 Pneumatic cistern IV

Concealed Cistern

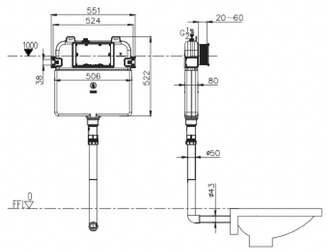

unit:mm

Installation

Pneumatic front actuation
Concealed installation
For squatting pan

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/ 6L; 3L/4.5L

Optional Actuators

G3100005 Plastic pneumatic G3100006 Plastic pneumatic G3100007 Glass

Certificates

G3004A

Concealed Cistern

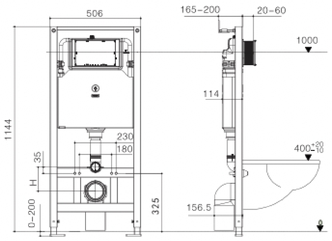

unit:mm

Installation

Front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features

Cistern thickness:114mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3004001 Single flush G3004108 Dual flush G3004109 Dual flush G3004110 Dual flush G3004111 Dual flush
G3004112 Dual flush G3004113 Dual flush G3004114 Dual flush G3004115 Dual flush G3004116 Dual flush
G3004117 Dual flush G3004118 Stainless steel G3100003 Glass G3100012 Dual flush G3004121 Dual flush
G3100002200 Glass

Certificates

G3004AU

NEW

Concealed Cistern

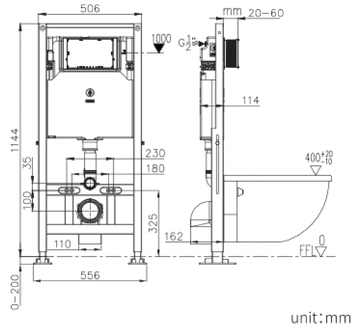

unit:mm

Installation

Front actuation
Concealed installation
For wall-hung toilet
For non-load-bearing wall

Features

Cistern thickness:114mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3004001 Single flush G3004108 Dual flush G3004109 Dual flush G3004110 Dual flush G3004111 Dual flush
G3004112 Dual flush G3004113 Dual flush G3004114 Dual flush G3004115 Dual flush G3004116 Dual flush
G3004117 Dual flush G3004118 Stainless steel G3100003 Glass G3100012 Dual flush G3004121 Dual flush
G3100002200 Glass

Certificates

G3004DC
Concealed Cistern

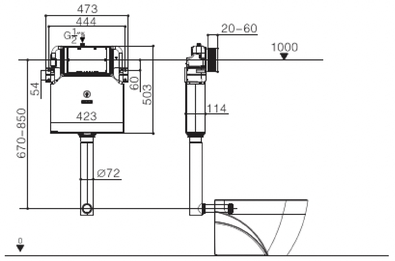

unit:mm

Installation
Front actuation
Concealed installation
For floor-standing toilet

Features
Cistern thickness:114mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G3004DE
Concealed Cistern

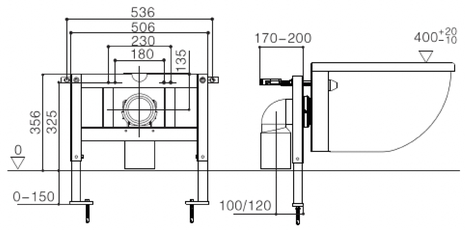

unit:mm

Installation
Front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:114mm
Actuator dimension:245X165mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G3004DA
Concealed Cistern

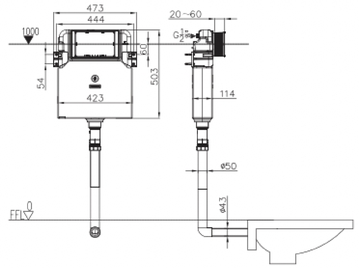

unit:mm

Installation
Front actuation
Concealed installation
For squatting pan

Features
Cistern thickness:114mm
Actuator dimension:245X165mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G3005AA
Concealed Cistern

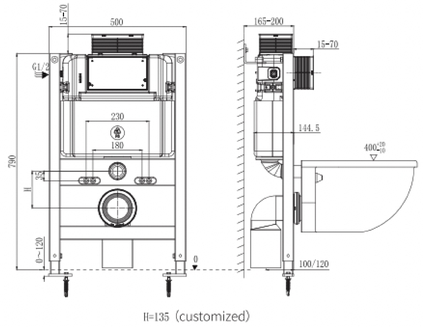

H=135 (customized)

unit:mm

Installation
Front or top actuation
Concealed installation
For wall-hung toilet
Mechanical or pneumatic actuation
For drywall or solid wall

Features
Cistern thickness:144.5mm
Actuator dimension:210X140mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

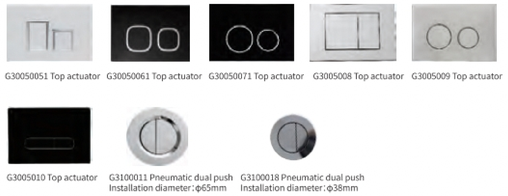

Certificates

G3005AI
Concealed Cistern

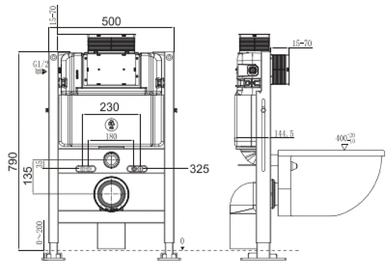

unit:mm

Installation
Front or top actuation
Concealed installation
For wall-hung toilet
Mechanical or pneumatic actuation
For non-load-bearing wall

Features
Cistern thickness:144.5mm
Actuator dimension:210X140mm
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

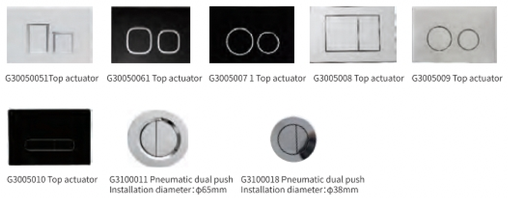

Certificates

G3005AB
Concealed Cistern

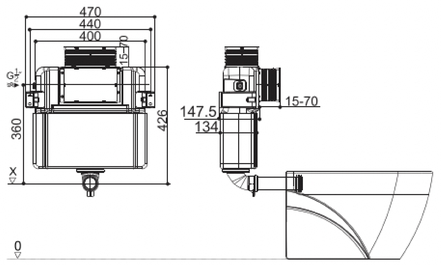

unit:mm

Installation
Front or top actuation
Concealed installation
For floor-standing toilet
Mechanical or pneumatic actuation

Features
Cistern thickness:134mm
Actuator dimension:210X140mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

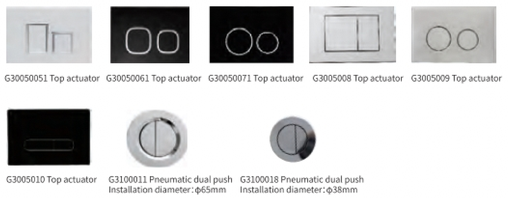

Certificates

G3005AC
Concealed Cistern

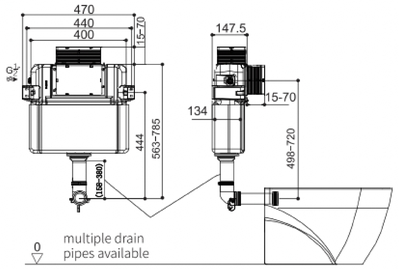

unit:mm

Installation
Front or top actuation
Concealed installation
For floor-standing toilet
Mechanical or pneumatic actuation

Features
Cistern thickness:134mm
Actuator dimension:210X140mm
Integrated blow molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

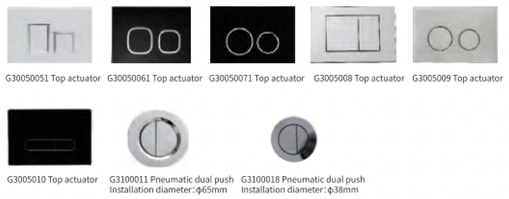

Certificates

G3005CA/G3005CE
Concealed Cistern

NEW

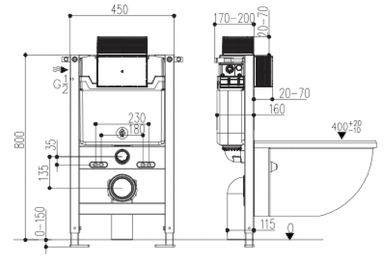

unit:mm

Installation
Front or top actuation
Concealed installation
For wall-hung toilet
Mechanical or pneumatic actuation
For drywall or solid wall

Features
Cistern thickness:160mm
G3005CA Actuator dimension:210X140mm
G3005CE Actuator dimension:245x165mm
(factory setting, not interchangeable)
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

G3005CE Optional Actuators

* Note: Actuators are the same as G3005AA/G3005AI/G3005AB/G3005AC.

G3005CA Optional actuators

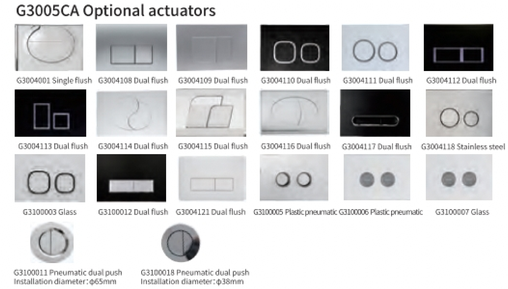

Certificates

G3005CB/G3005CF

Concealed Cistern

NEW

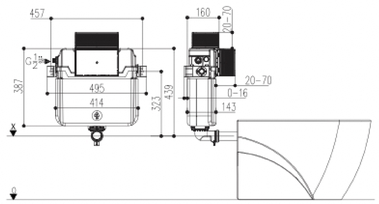

unit:mm

Installation

Front or top actuation
Concealed installation
For floor-standing toilet
Mechanical or pneumatic actuation

Features

Cistern thickness:143mm
G3005Cf Actuator dimension:210X140mm
G3005CB Actuator dimension:245x165mm
(factory setting, not interchangeable)
Injection molding
Flush volume:3L/6L; 3L/4.5L

G3005CF Optional Actuators

* Note: Actuators are the same as G3005AA/G3005AI/G3005AB/G3005AC.

G3005CB Optional Actuators

Certificates

G3005CC/G3005CG

Concealed Cistern

NEW

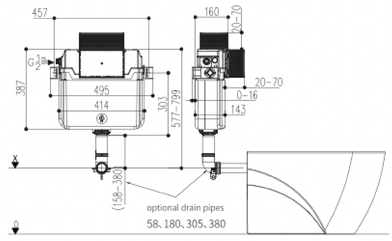

unit:mm

Installation

Front or top actuation
Concealed installation
For floor-standing toilet
Mechanical or pneumatic actuation

Features

Cistern thickness:143mm
G3005CG Actuator dimension:210X140mm
G3005CC Actuator dimension:245x165mm
(factory setting, not interchangeable)
Injection molding
Flush volume:3L/6L; 3L/4.5L

G3005CG Optional Actuators

* Note: Actuators are the same as G3005AA/G3005AI/G3005AB/G3005AC.

G3005CC Optional Actuators

Certificates

G3008BA

Concealed Cistern



unit:mm

Installation

Front pneumatic actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features

Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3008ED

Concealed Cistern:

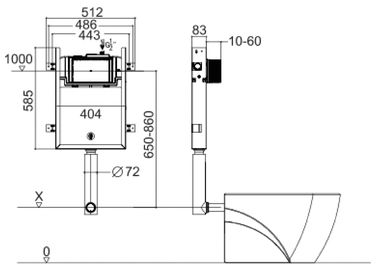

unit:mm

Installation

Front pneumatic actuation
Concealed installation
For floor-standing toilet

Features

Cistern thickness:83mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3008EA
Concealed Cistern

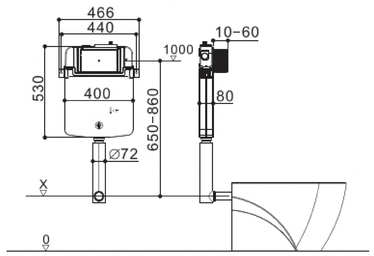

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For floor-standing toilet

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3100005 Plastic pneumatic

G3100006 Plastic pneumatic

G3100007 Glass

G3008EC
Concealed Cistern



unit:mm

Installation
Pneumatic front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G310000 5plastic pneumatic

G3100006 Plastic pneumatic

G3100007 Glass

G3008EB
Concealed Cistern

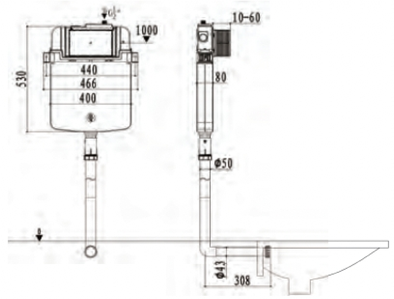

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For squatting pan

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3100005 Plastic pneumatic

G3100006 Plastic pneumatic

G3100007 Glass

G3008AA
Concealed Cistern

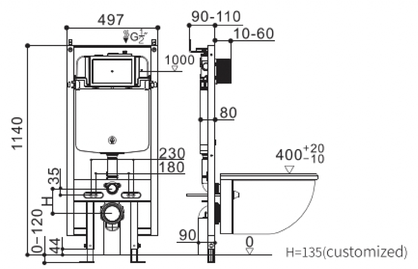

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3004001 Single flush

G3004108 Dual flush

G3004109 Dual flush

G3004110 Dual flush

G3004111 Dual flush

G3004112 Dual flush

G3004113 Dual flush

G3004114 Dual flush

G3004115 Dual flush

G3004116 Dual flush

G3004117 Dual flush

G3004118 Stainless steel

G3100003 Glass

G3100012 Dual flush

G3004121 Dual flush

G3100002200 Glass

Certificates

G3008AF
Concealed Cistern

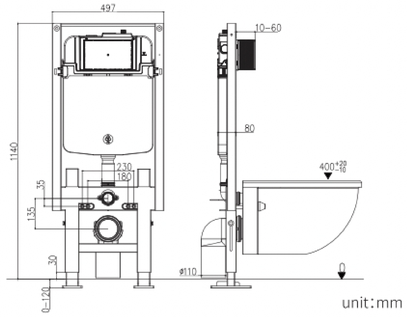

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For wall-hung toilet
For non-load-bearing wall
For drywall or solid wall

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3008DD
Concealed Cistern



unit:mm

Installation
Pneumatic front actuation
Concealed installation
For floor-standing toilet

Features
Cistern thickness:83mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

G3008DA
Concealed Cistern

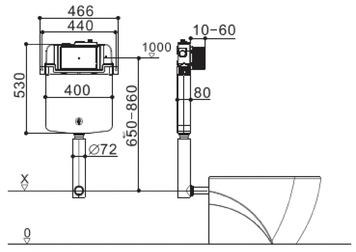

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For floor-standing toilet

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

Certificates

G3008DC
Concealed Cistern



unit:mm

Installation
Pneumatic front actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

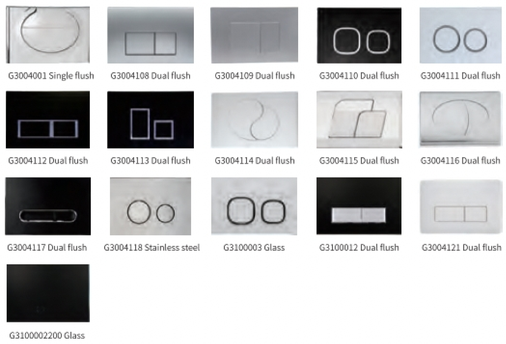

Certificates

G3008DB
Concealed Cistern

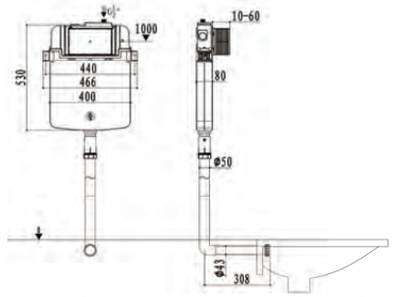

unit:mm

Installation
Pneumatic front actuation
Concealed installation
For squatting pan

Features
Cistern thickness:80mm
Actuator dimension:245X165mm
Injection molding
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

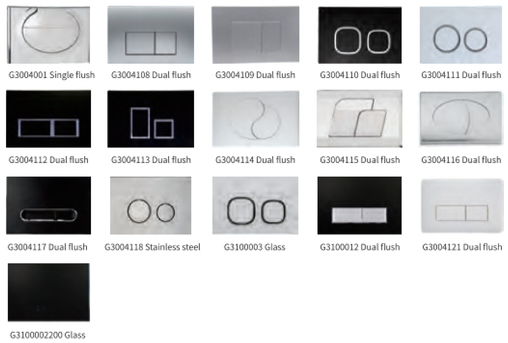

Certificates

G3004RA
Deodorizing type

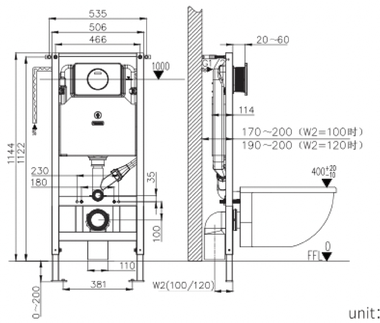

unit:mm

Installation
Front sensing actuation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Cistern thickness:114mm
Actuator dimension:245X165mm
Deodorization sensor
Integrated blow molding
Load capacity:400KG
Adjustable feet
Flush volume:3L/6L; 3L/4.5L

Optional Actuators

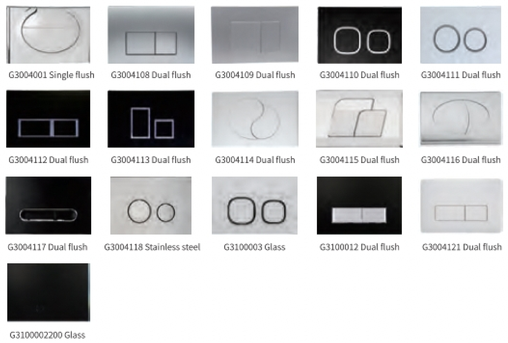

G30014A
Basin Frame



unit:mm

Installation
Concealed installation
For wall-hung basin
For drywall or solid wall

Features
Overall thickness:135mm
Load capacity:150KG

G30013A
Bidet Frame



unit:mm

Installation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Overall thickness:135mm
Load capacity:150KG

G30012A
Wall-hung Toilet Frame

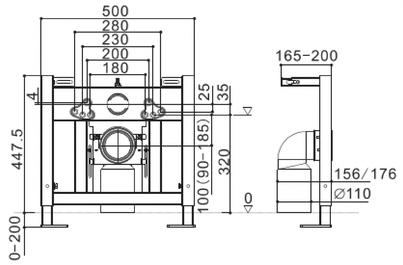

unit:mm

Installation
Concealed installation
For wall-hung toilet
For drywall or solid wall

Features
Overall thickness:165mm
Load capacity:400KG

G30016A
Urinal Frame

NEW



unit:mm

Installation
Concealed installation
For wall-hung urinal
For drywall or solid wall

Features
Overall thickness:75mm
Load capacity:150KG

PG30031260
Vertical Discharge Pipe

Material:PVC
Specification:Ø91xØ90

PG30041540
Vertical Discharge Pipe

Material:HDPE
Specification:Ø91xØ110

PG30010490
Horizontal Discharge Pipe



Material:PVC
Specification:Ø91xØ114

PG30041550
Vertical Discharge Pipe

Material:HDPE
Specification:Ø91xØ90

PG30010050/51
Vertical Discharge Pipe



Material:PVC
Specification:Ø91xØ110

PG3003156
Vertical Discharge Pipe

Material:HDPE
Specification:Ø91xØ90

PG30010640
Connecting Pipe A



Material:HDPE
Specification:Ø89xØ80xØ180

PG30010641
Connecting Pipe B

Material:HDPE
Specification:
Ø89xØ80xØ230

PG30010170
Connecting Pipe A

Material:PP
Specification:Ø45xØ50x183

PG30010530
Connecting Pipe C

Material:PP
Specification:Ø45xØ50x245

PG30010540
Adapter A



Material:PVC
Specification:Ø110.4xØ100.4

PG30010480
Adapter B

Material:PVC
Specification:Ø114xØ90

PG30010460
Adapter C



Material:PVC
Specification:Ø110.8xØ103

ZH51
Adapter

Material:HDPE
Specification:Ø90xØ110

ZH60
Shifter



Material:PVC
Specification:Ø91xØ114

PG30041550
Vertical Discharge Pipe

Material:HDPE
Specification:Ø91xØ90

PG30031650 NEW

Vertical Discharge Pipe

Material: HDPE
Specification: Ø91xØ90

ZH6200

Vertical Discharge Pipe



Material: PP
Specification: Ø76xØ114

ZH6201 NEW

Vertical Discharge Pipe

Material: PP
Specification: Ø76xØ114

PG30010770 NEW

Horizontal Discharge Pipe

Material: HDPE
Specification: Ø91xØ90

PG30010780 NEW

Horizontal Discharge Pipe



Material: PVC
Specification: Ø91xØ110

ZH5603 NEW

Disassembly-free Cleaning Filter

Product Features:
The filter can be cleaned without disassembly
For G3008 series

PG32000170000 NEW

Riser Quick Connector

Material: PVC
Specification: Ø110xØ110

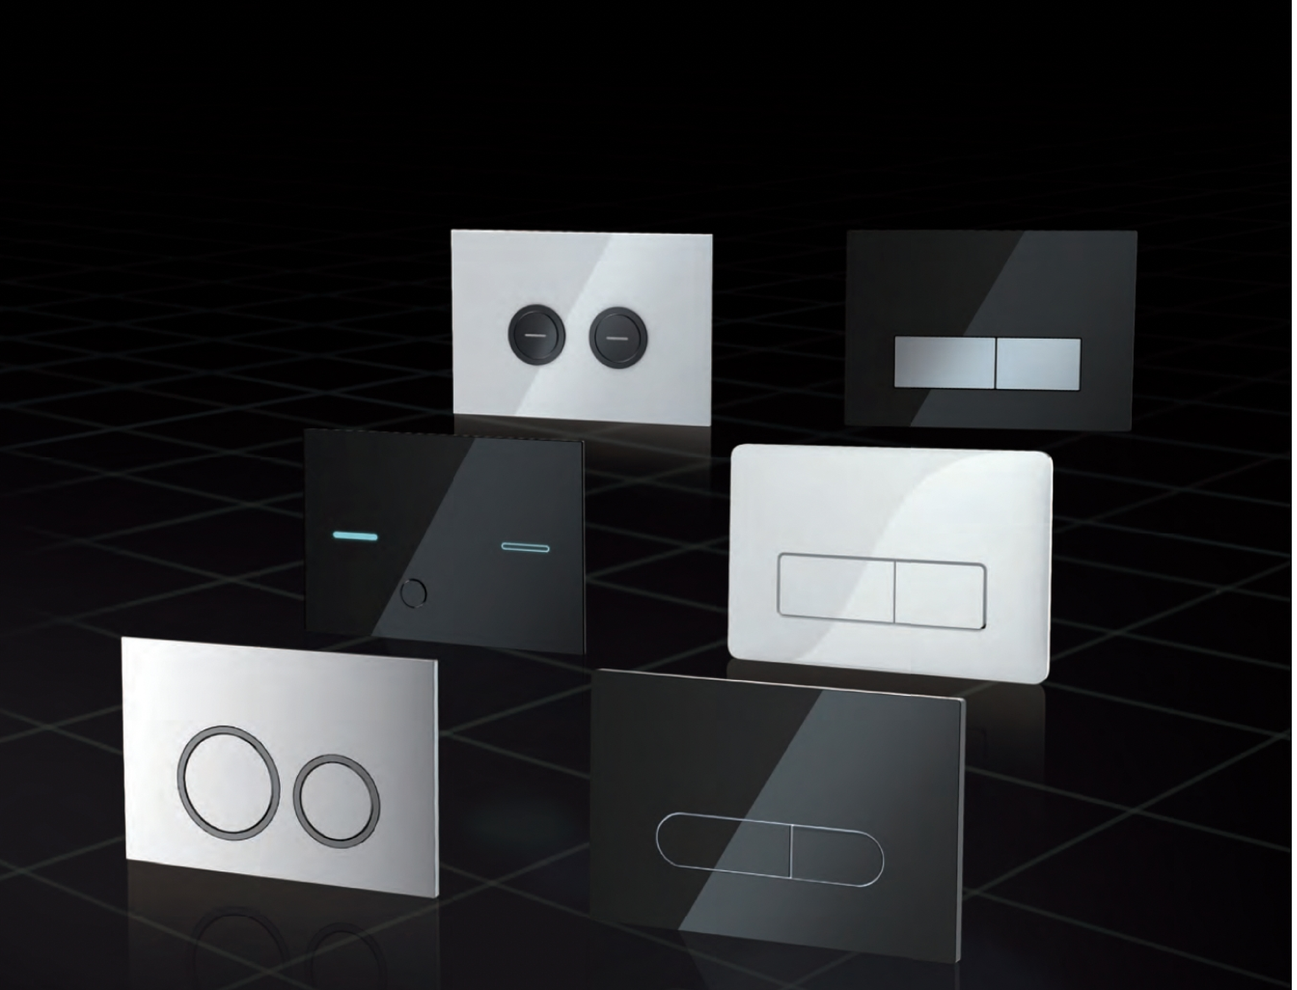

High Quality, Modern Design

Actuators for concealed cisterns

Various Materials
polished chrome, matt chrome,
white, black, brushed stainless steel, glass

Easy Maintenance
simple installation and disassembly

Universal Fit
fit for various concealed cisterns

Modern Design
simple and modern, good decor for bathroom

Actuators for
Concealed Cisterns

mechanical type >

G3004129 NEW
Single Flush Actuator





Material & Color

Customized colors

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3100012 NEW
Dual Flush Actuator



Material & Color

black

white

Customized colors

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3005010 NEW
Dual Flush Actuator



Material & Color

polished chrome

matt chrome

matt white

matt black

ceramic white

Operation mode
Mechanical

Available products

G3005A, G3005C series

G3004123 NEW
Single Flush Actuator (Stainless Steel)



Material & Color

polished chrome

brushed stainless steel

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004127 NEW
Single Flush Actuator



Material & Color

polished chrome

matt chrome

matt white

matt black

ceramic white

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3100003
Glass Actuator



Material & Color

black

white

*Customized colors

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004117
Dual Flush Actuator



Material & Color

polished chrome

matt chrome

matt white

matt black

ceramic white

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004108
Dual Flush Actuator



Material & Color

polished chrome

matt chrome

matt white

matt black

ceramic white

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004110
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004109
Dual Flush Actuator





Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004111
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004112
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004113
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004114
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004115
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004116
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004001
Dual Flush Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004118
Dual Flush Actuator (Stainless Steel)



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3004121
Front Actuator



Material & Color

Operation mode
Mechanical

Available products

G3003 Mechanical I , Mechanical II , Mechanical III, Mechanical IV, G3004A, G3004AD, G3004DC, G3004DE, G3004DA, G3005C, G3007, G3008A, G3008D series

G3005005
Top Actuator



Material & Color

Operation mode
Mechanical

Available products

G3005A, G3005C series

G3005006
Top Actuator



Material & Color

Operation mode
Mechanical

Available products

G3005A, G3005C series

G3005008
Top Actuator



Material & Color

Operation mode
Mechanical

Available products

G3005A, G3005C series

G3005009
Top Actuator



Material & Color

Operation mode
Mechanical

Available products

G3005A, G3005C series

G3005007
Top Actuator



Material & Color

Operation mode
Mechanical

Available products

G3005A, G3005C series

pneumatic type >

G3100006
Pneumatic Actuator (Plastic)



Material & Color

Operation mode

Pneumatic (+4cm extension tube)

Available products

G30035 Pneumatic I , Pneumatic II , Pneumatic III, Pneumatic IV, G3005C Pneumatic, G3008B, G3008E series

G3100005
Pneumatic Actuator (Plastic)



Material & Color

Operation mode

Pneumatic (+4cm extension tube)

Available products

G30035 Pneumatic I , Pneumatic II , Pneumatic III, Pneumatic IV, G3005C Pneumatic, G3008B, G3008E series

G3100007
Glass Actuator



Material & Color

Customized colors

Operation mode

Pneumatic (+4cm extension tube)

Available products

G30035 pneumatic I , pneumatic II , pneumatic III, pneumatic IV, G3005C pneumatic, G3008B, G3008E series

G3100011
Round Pneumatic Dual Flush Button

Material & Color

Operation mode

Pneumatic (+4cm extension tube)

Available products

G30035 Pneumatic I , Pneumatic II , Pneumatic III, Pneumatic IV, G3005C Pneumatic, G3008B, G3008E series, G3005A pneumatic

G3100018
Round Pneumatic Dual Flush Button

Material & Color

Operation mode

Pneumatic (+4cm extension tube)

Available products

G30035 Pneumatic I , Pneumatic II , Pneumatic III, Pneumatic IV, G3005C Pneumatic, G3008B, G3008E series, G3005A pneumatic

sensing type >

G3100031 NEW
Dual Flush Sensing Actuator



Material & Color

polished chrome | matt chrome | matt white | matt black | ceramic white

Operation mode

Sensing+mechanical

Available products

G3003P, G3008P

G3100026 NEW
Glass Sensing Actuator



Material & Color

tempered glass black

Operation mode

Sensing+mechanical

Available products

G3003P, G3004P, G3008P

G31000022
Glass Actuator



Material & Color

black

Operation mode

Wave sensor, auto full-flush button(for power-off situation)

Available products

G3003P, G3004P, G3008P

G3100019 NEW
Front Actuator



Material & Color

stainless steel brushed

Operation mode

Sensing+mechanical

Available products

G3003P, G3004P, G3008P