




Sensor Faucets






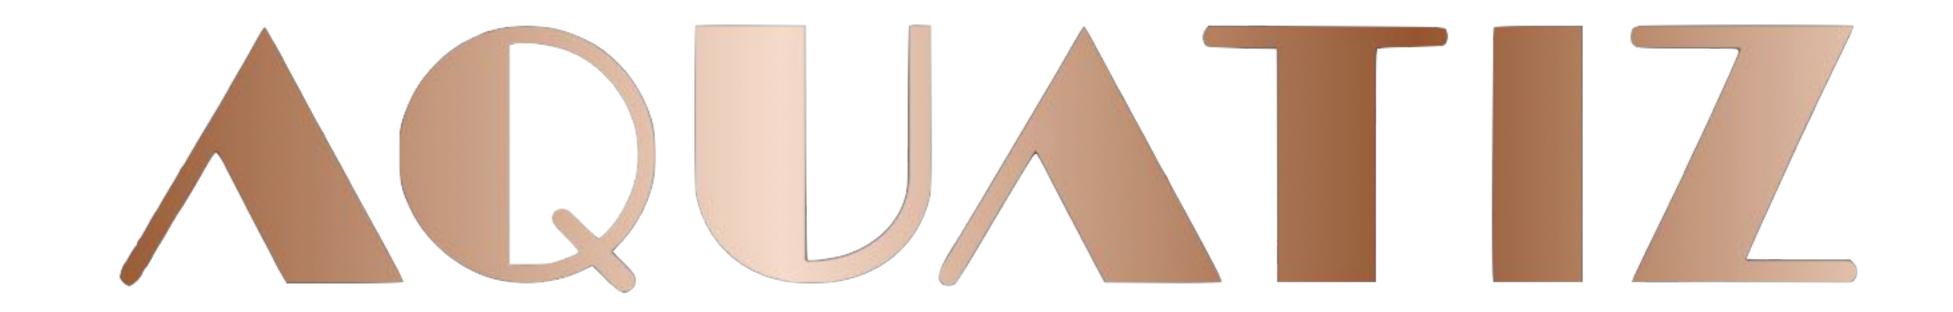

Anti-Interference

Microcomputer control, with strong anti-light and anti-UV functions, to prevent misoperation caused by mirror refelction.



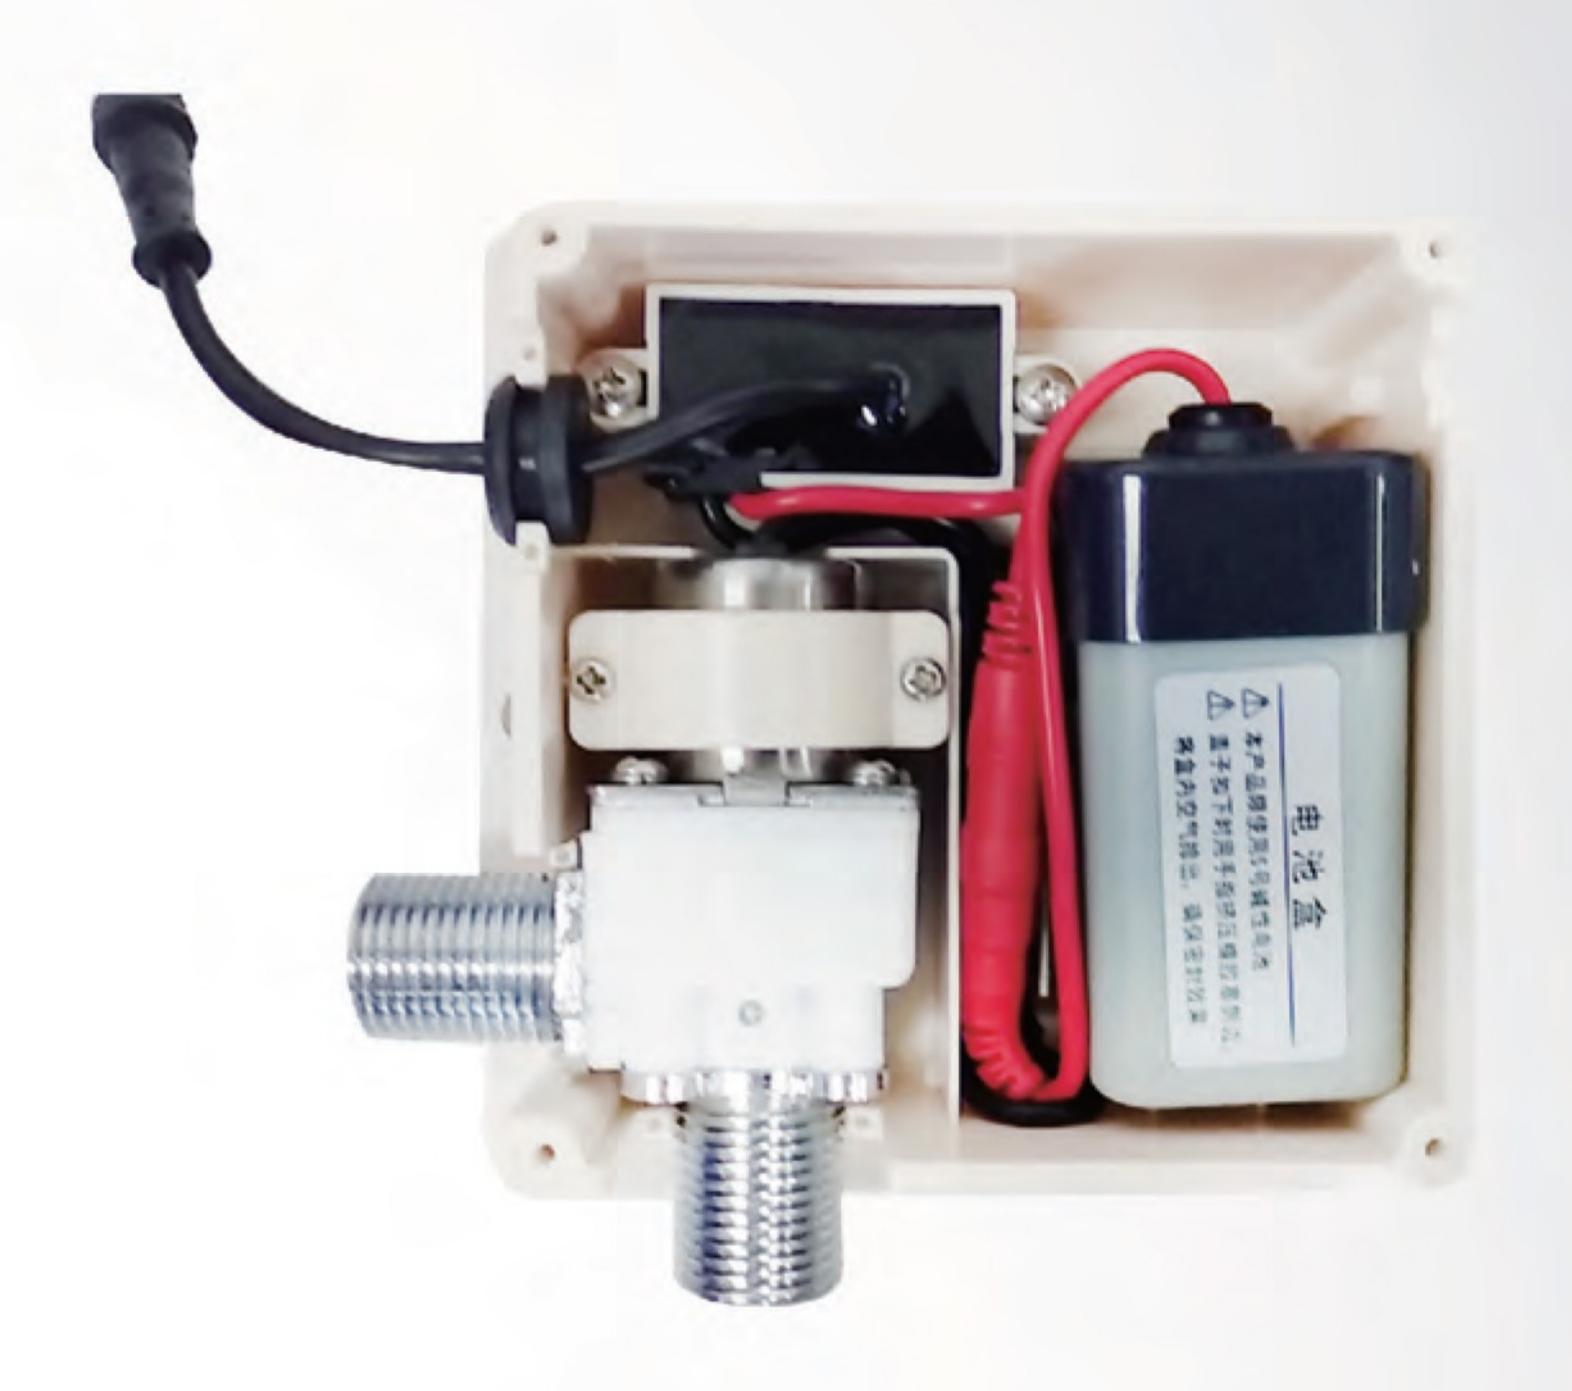

Intelligent Solenoid Valve

Using bistable pulse solenoid valve, more stable and reliable, more energy-saving, life time up to 500,000 (lab test: 800,000)

Touchless Faucets Touchless Faucets


D50003 Touchless Faucet





D500031 Touchless Faucet





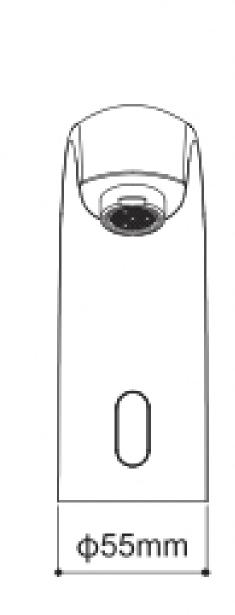

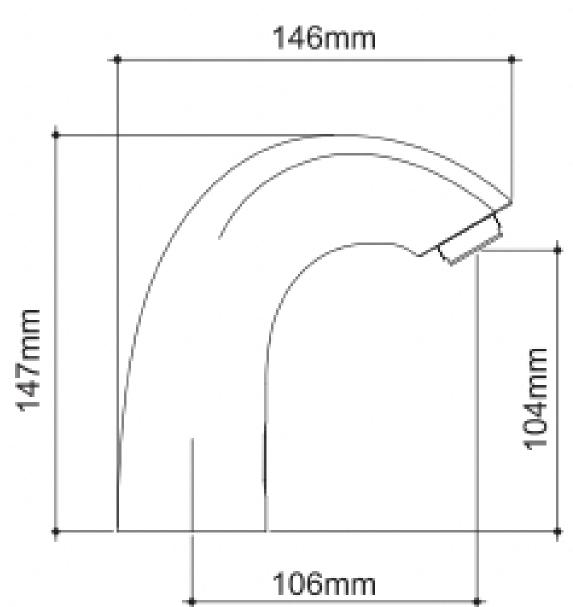

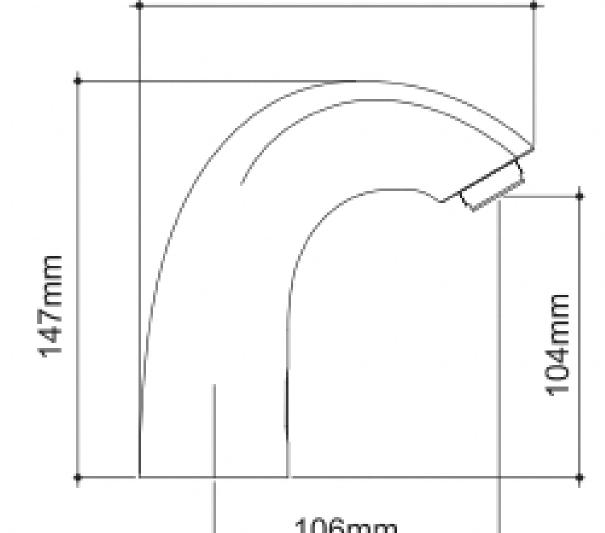


Power

DC: 6V (4* AA alkaline batteries) AC: 100V-240V, 50/60Hz AC/DC power supply: AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Features

Working temperature: 1°C-45°C Water temperature: 4°C-45°C Sensing distance: 30±2cm Water inlet thread: G1/2 external thread Water pressure: static pressure 0.05MPa-static pressure 0.8MPa



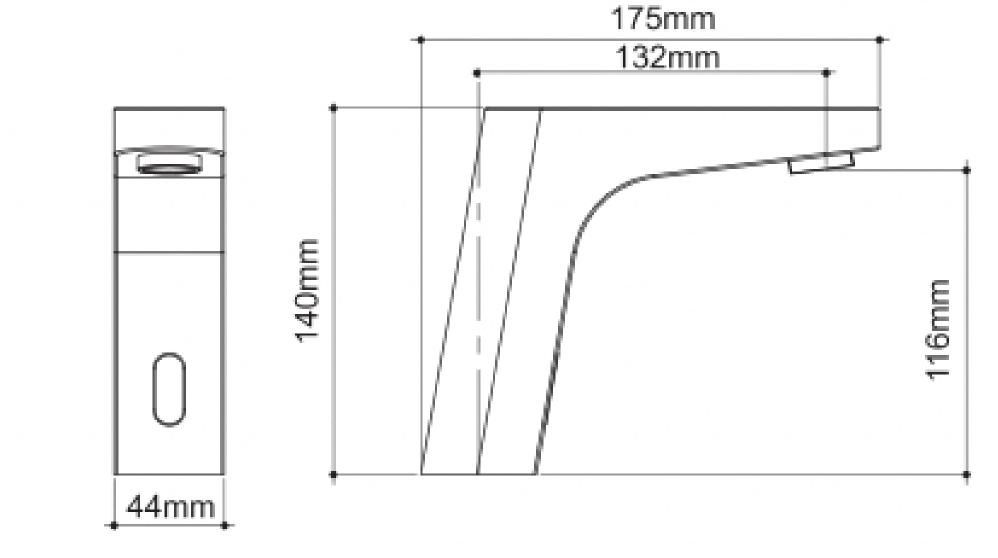

Power

DC: 6V (4* AA alkaline batteries) AC: 100V-240V, 50/60Hz AC/DC power supply: AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Features

Working temperature: 1°C-45°C Water temperature: 4°C-45°C Sensing distance: 30±2cm Water inlet thread: G1/2 external thread Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

D500032 Touchless Faucet

Power

Features

DC: 6V (4* AA alkaline batteries)

Working temperature: 1°C-45°C

Water inlet thread: G1/2 external thread

Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

Water temperature: 4°C-45°C

Sensing distance: 30±2cm

AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

AC: 100V-240V, 50/60Hz


AC/DC power supply:







D500033 Touchless Sink Faucet



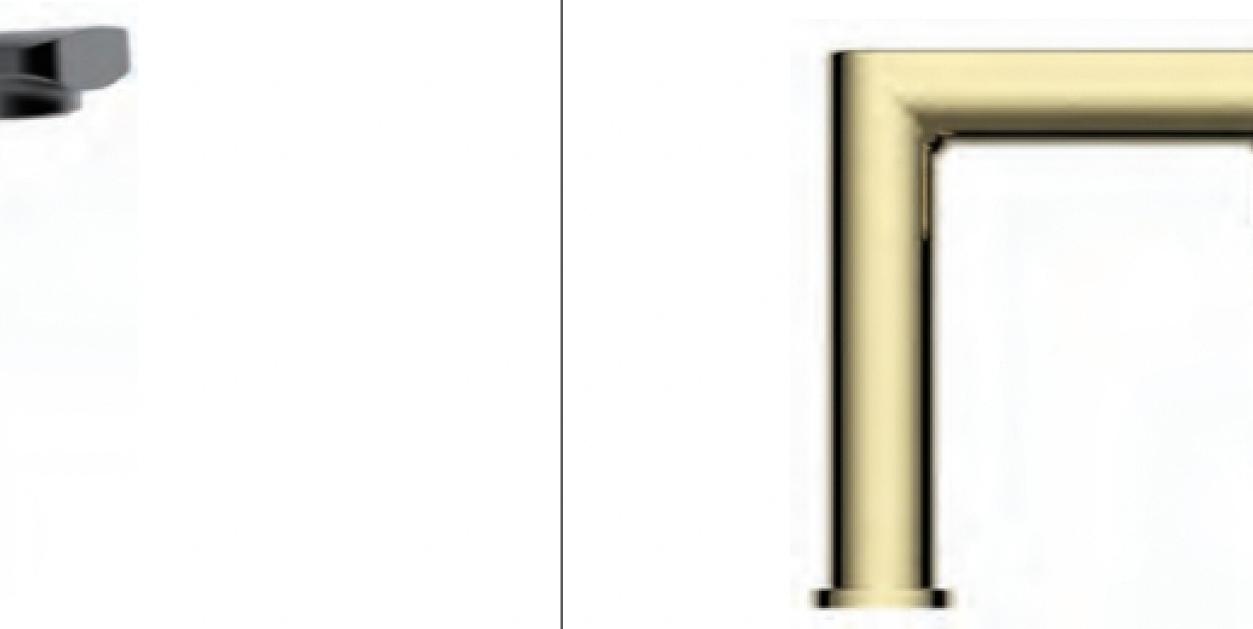

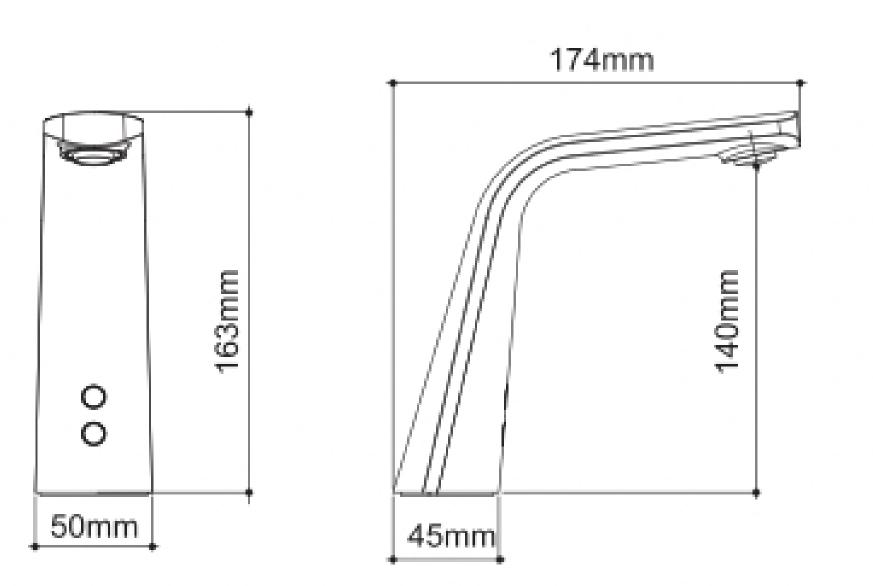

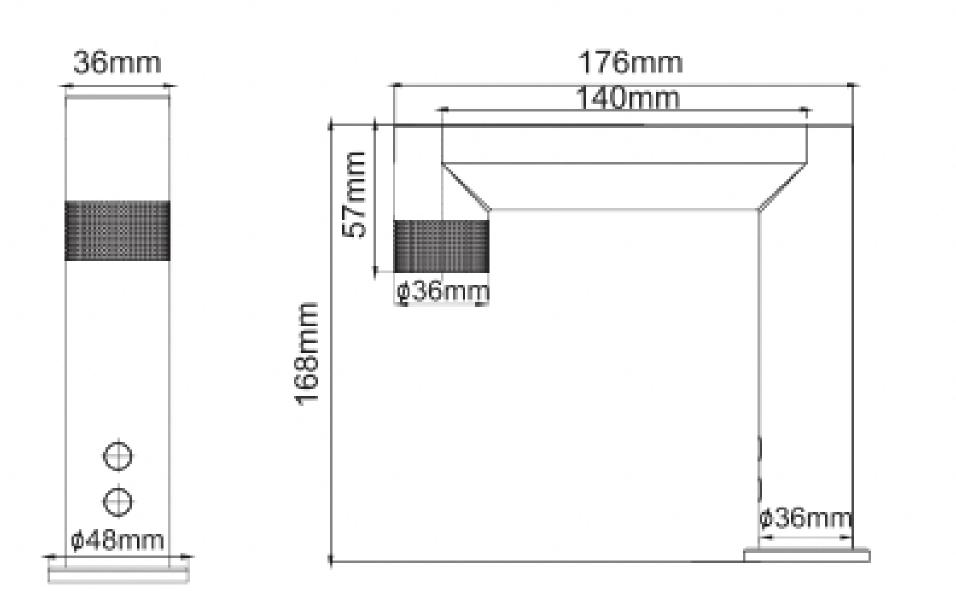

Power

DC: 6V (4* AA alkaline batteries) AC: AC 100V-240V,50/60Hz AC/DC power supply: AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Water inlet thread: G1/2 external thread Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

Features

Working temperature: 1°C-45°C Water temperature: 4°C-45°C Sensing distance: 30±2cm


D500035 Touchless Sink Faucet




D50002 In-wall Touchless Faucet






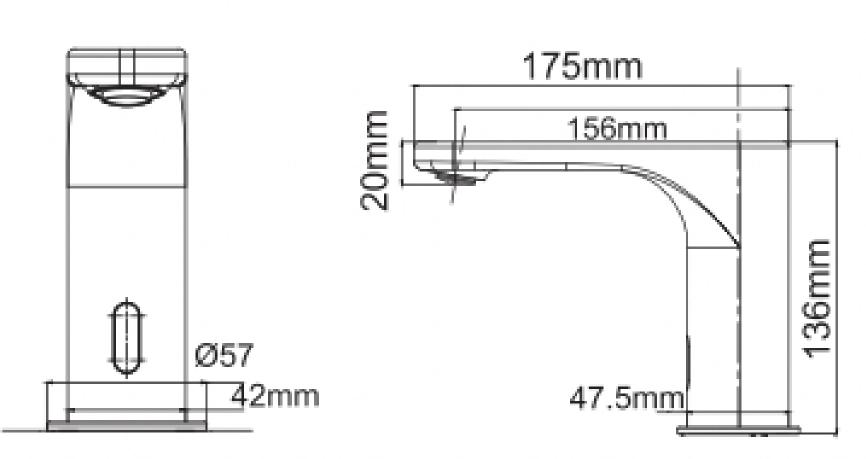



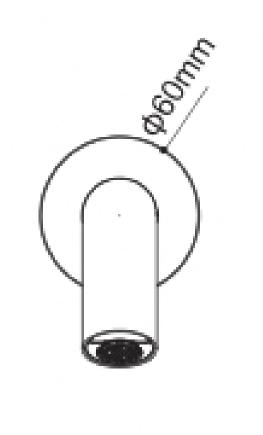

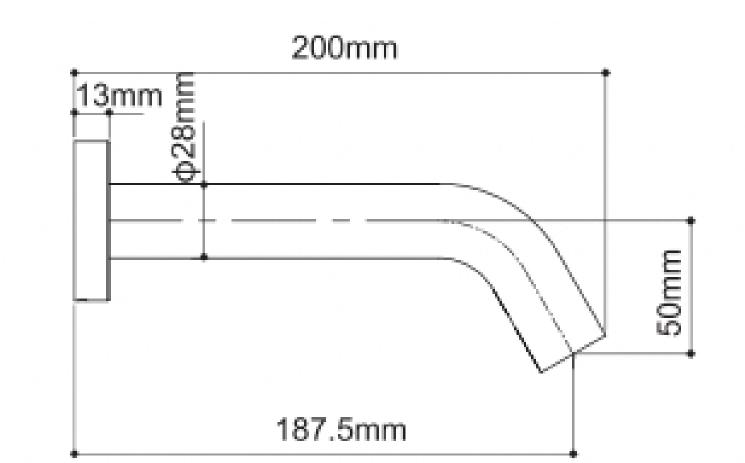

Power

DC: 6V (4* AA alkaline batteries)
AC: 100V-240V, 50/60Hz
AC/DC power supply:
AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Power

DC: 6V (4* AA alkaline batteries)
AC: 100V-240V, 50/60Hz
AC/DC power supply:
AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Features


Working temperature: 1°C-45°C
Water temperature: 4°C-45°C
Sensing distance: 30±2cm
Water inlet thread: G1/2 external thread
Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

Features

Working temperature: 1°C-45°C
Water temperature: 4°C-45°C
Sensing distance: 25±2cm
Water inlet thread: G1/2 external thread
Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

D5002 Touchless Faucet



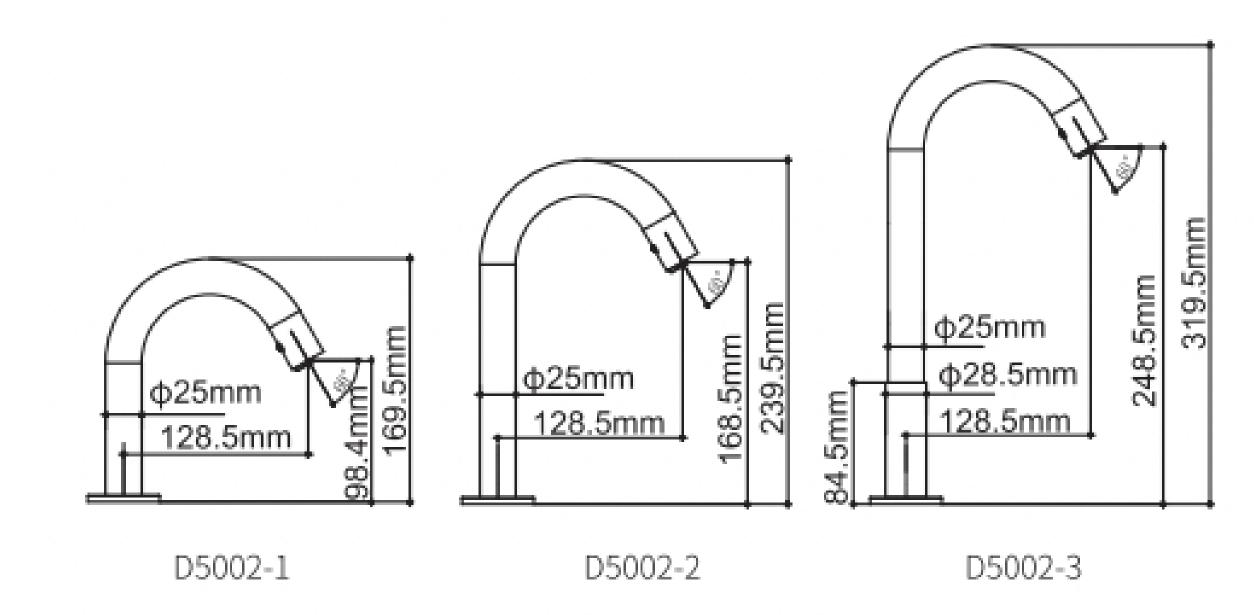

Power

DC: 6V (4* AA alkaline batteries)
AC: 100V-240V, 50/60Hz
AC/DC power supply:
AC 100V-240V, 50/60Hz & 4 * AA alkaline batteries

Features


Working temperature: 1°C-45°C
Water temperature: 4°C-45°C
Sensing distance: 21±1cm
Water inlet thread: G1/2 external thread
Water pressure: static pressure 0.05MPa-static pressure 0.8MPa

Certificates



AU50A70-RT Touchless Kitchen Faucet



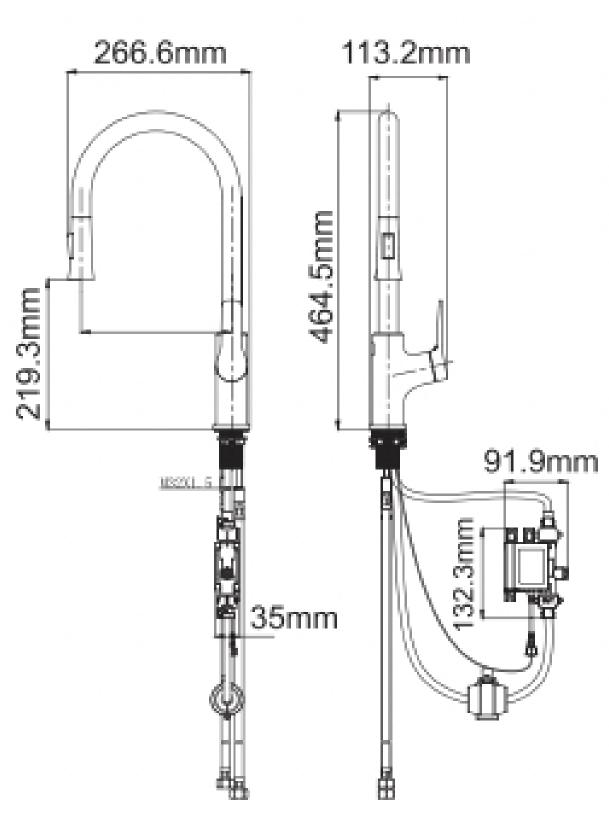

Power

DC: 6V (4* AA alkaline batteries)

Features

Working temperature: 1°C-45°C
Water temperature: 4°C-45°C
Sensing distance: 21±1cm
Water inlet thread: G1/2 external thread
Water pressure: static pressure 0.05MPa-static pressure 0.8MPa